

## Salesforce SALESFORCE-MULESOFT-DEVELOPER-I Exam

Salesforce Certified MuleSoft Developer I

### Thank you for Downloading SALESFORCE-MULESOFT-DEVELOPER-I exam PDF Demo

You can also try our SALESFORCE-MULESOFT-DEVELOPER-I practice exam software

**Download Free Demo** 

# DEMOSSIONS & ANSWERS DEMOSSIONS (LIMITED CONTENT)

## Version: 14.0

#### Question: 1

Refer to the exhibit.

▼ main	General Advanced Error Mapping	Problems Console R Progress Cons		
	Metadata Notes	Connector configuration: Database_Config 😏 🔶 🗹 Query		
Error handling		SQL Query Text: SELECT * FROM accounts WHERE city = :city AND state = :state		
		Input Parameters:		

What expression correctly specifies input parameters to pass the city and state values to the SQL query?



```
#[
    inputParams: {
        city: "San Francisco",
        state: "CA"
    }
]
D)
#[
    inputParams: [
        "San Francisco",
        "CA"
    ]
]
```

A. Option A B. Option B C. Option C D. Option D

Answer: A

Explanation:

MuleSoft Documentation Reference : https://docs.mulesoft.com/db-connector/1.9/database-connector-select

#### Question: 2

A Mule flow has three Set Variable transformers. What global data structure can be used to access the variables?

- A. Mule event attributes
- B. Mule event message
- C. Mule application properties
- D. Mule event


Answer: D

Explanation:

Mule event is correct answer. Mule event has two parts which are as follows

1) Message (which contains payload and attributes like headers and query/uri parameters

2) Variables

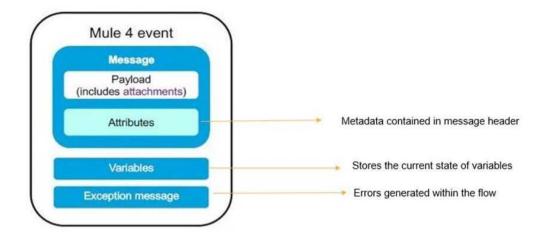

#### **Question: 3**

In an application network. If the implementation but not the interface of a product API changes, what needs to be done to the other APIs that consume the product API?

- A. The applications associated with the other APIs must be restarted
- B. The applications associated with the other APIs must be recoded
- C. The other APIs must be updated to consume the updated product API
- D. Nothing needs to be changed in the other APIs or their associated applications

Answer: D


Explanation:

Correct answer is Nothing needs to be changed in the other APIs or their associated applications This is the benefit of having separate interface layer. As there are no changes to interface , no changes are required on the API's which consumes this API in context

#### **Question: 4**

Refer to the exhibit.

**Answer: C** 

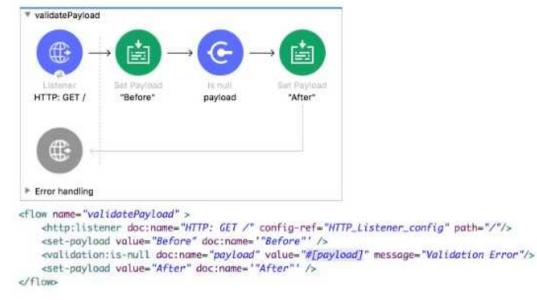

What is the response to a web client request to <a href="http://localhost:8081">http://localhost:8081</a>?

- A. After
- B. before
- C. Validation Error
- D. null

Explanation:

#### • 0 = 0 = = = + + • • 0 • 0 • 0 • 0 5 # 0 Quick Access Mathanced REST client E S = - Vquestion2 Vscetter-gather Vquestion12 x Package Explorer % Edit View Window Request Worki question 12 question 2 scattor-gather Def -\* question12Pa < HTTP://LOCALHOST:808. × HTTPS://CLOUDSSD-TES. de la 0 GET V http://localhost.8086/g12 HTTP:GET Request parameters 🐱 æ F Error handling 500 Server Error 3941.33 hts Message Flow Global Elements' Configuration XML 8 H APikit Consoles × 💽 Mule Proporties 👔 Problems 😨 Console 😒 🍄 Mule Debugger SAVE SOURCE VIEW COPY question12 [Mile Applications] Mule Server 4.2.7 EE Validation Error INTO 2020-02-06 21:20:20,499 [[XuleRuntume].opulight.10: [questio INTO 2020-02-06 21:28:20,512 [[NuleRuntume].opulight.18: [questio ERROR 2020-02-06 21:28:22,599 [[NuleRuntume].opulight.18: [questio : Validation fires. : Validation fires. : Validation fires. : <u>question1710v/processors/1</u> @ question12:question12.xml:14 (psyload) : <u>question1710v/processors/1</u> @ question12:question12.xml:14 (psyload) : <u>duestion115-null docimeme="psyload" docid="3dd171d6-ba7-46es-bf46-boc26b1e6855</u>" value="%]psyload]" message="Validation firef"×/validat Message Error type Element Element XHL (set debug level logging or '-Dmule.verbose.exceptions=true' for everything)

#### **Question: 5**

#### Refer to the exhibits.



The two Mule configuration files belong to the same Mule project. Each HTTP Listener is configured with the same host string and the port number, path, and operation values are shown in the display names.

What is the minimum number of global elements that must be defined to support all these HTTP Listeners?

- A. 1
- B. 2 C. 3
- D. 4
- U. <del>-</del>

Answer: C

Explanation:

In this case three configurations will be required each for port 8000, 6000 and 7000.

There would be three global elements defined for HTTP connections.

Each HTTP connection will have host and port. One example shown below with host as localhost and port 6000

-		_
Pa	σΘ	
ı u	ຮບ	/

	iration element for a HttpListener.	
General	Notes Help	
Name: HTTP_Listener_config		
onnecti	on	
Genera	ection	
Prote	ocol: HTTP (Default)	
	: All Interfaces [0.0.0.0] (default)	
Host		

To use an HTTP listener, you need to declare a configuration with a corresponding connection. This declaration establishes the HTTP server that will listen to requests.

Additionally, you can configure a base path that applies to all listeners using the configuration. <a href="http://www.energy.org">http://www.energy.org</a> http://www.energy.org/</a> http://www.energy.org/</a>

<http://www.setter.connection.colling.

</http:listener-config>

https://docs.mulesoft.com/http-connector/1.6/http-listener-ref#http-listener-configuration

## Thank You for trying SALESFORCE-MULESOFT-DEVELOPER-I PDF Demo

## To try our SALESFORCE-MULESOFT-DEVELOPER-I practice exam software visit link below

## https://prepbolt.com/SALESFORCE-MULESOFT-DEVELOPER-I.html

## Start Your SALESFORCE-MULESOFT-DEVELOPER-I Preparation

Use Coupon "SAVE50" for extra 50% discount on the purchase of Practice Test Software. Test your SALESFORCE-MULESOFT-DEVELOPER-I preparation with actual exam questions.